

Fig. 1

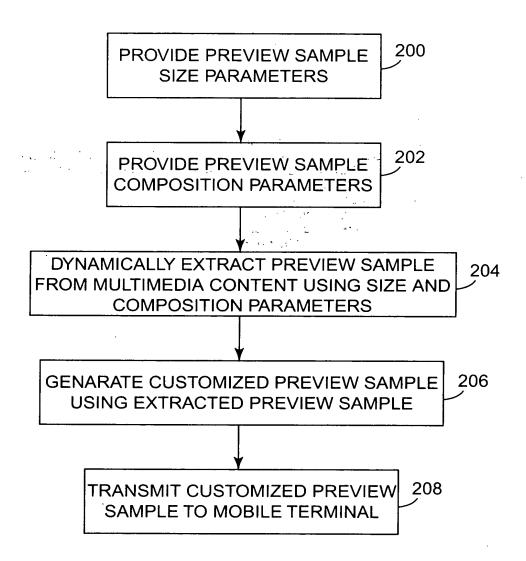


Fig. 2


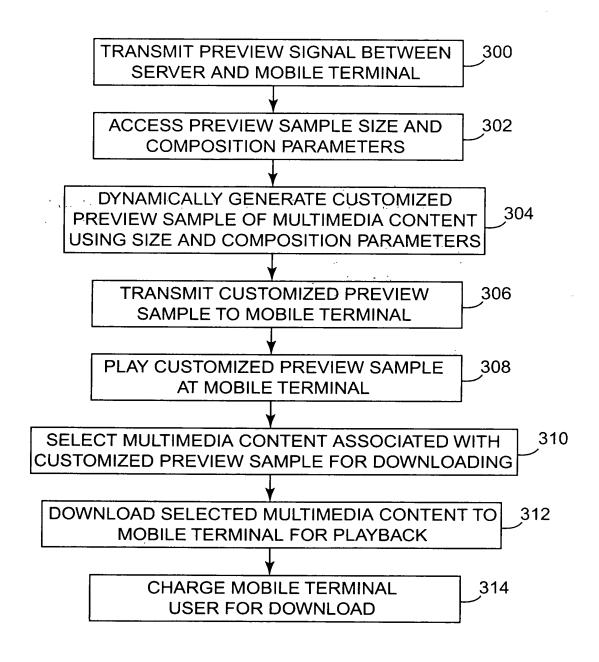


Fig. 3

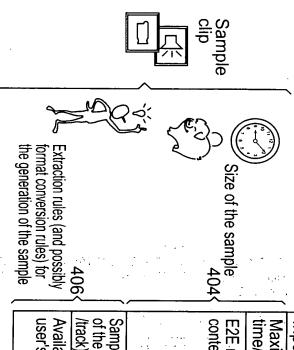

| | Input parameters | Source of input parameters |
|---|---|--|
| y | Maximum sample downloading time/cost | Maximum sample downloading Set by service/content provider (or user) time/cost |
| of the sample 404 | E2E mean bit rate value of the PDP Query from context - user pro | Query from - user profile of 3G (MEXe) terminal or - e.g. GGSN (estimated value) |
| | | or a 'statistical QoS value' |
| 406 | Sample composition rules (e.g. position of the sample within the content item /track) | Sample composition rules (e.g. position Defined by service/content provider (rules of the sample within the content item can be global or item specific rules) |
| rules (and possibly version rules) for the sample | Available multimedia capabilities in user's terminal | Available multimedia capabilities in Query from profile databases (using e.g. UAHeader info) or capability negotiation with the terminal (e.g. UAProf) |

Fig. 4

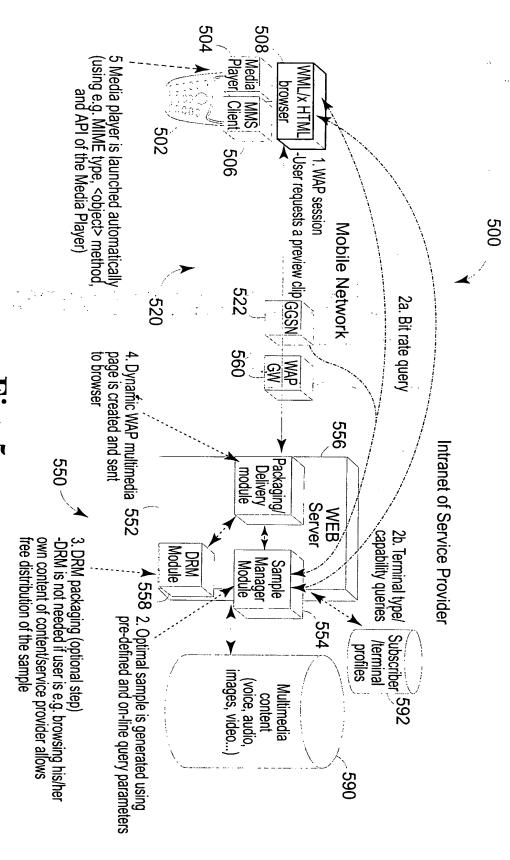


Fig. 5

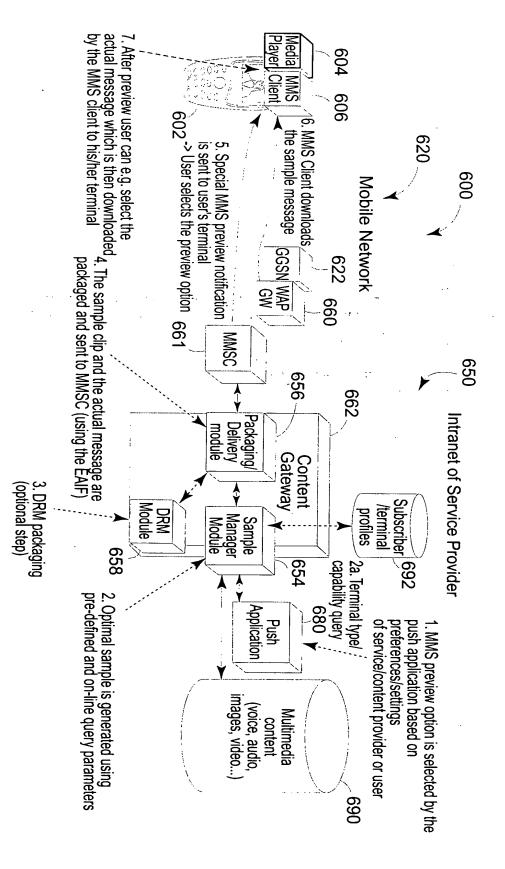


Fig. 6